

Nuclear Fuel Waste Projections in Canada – 2015 Update

NWMO-TR-2015-19

December 2015

M. Garamszeghy

Nuclear Waste Management Organization

nwmo

NUCLEAR WASTE
MANAGEMENT
ORGANIZATION

SOCIÉTÉ DE GESTION
DES DÉCHETS
NUCLÉAIRES

Nuclear Waste Management Organization
22 St. Clair Avenue East, 6th Floor
Toronto, Ontario
M4T 2S3
Canada

Tel: 416-934-9814
Web: www.nwmo.ca

Nuclear Fuel Waste Projections in Canada – 2015 Update

NWMO-TR-2015-19

December 2015

M. Garamszeghy
Nuclear Waste Management Organization

Document History

Title:	Nuclear Fuel Waste Projections in Canada – 2015 Update		
Report Number:	NWMO-TR-2015-19		
Revision:	R000	Date:	December 2015
Nuclear Waste Management Organization			
Authored by:	M. Garamszeghy		
Reviewed by:	U. Stahmer		
Approved by:	D. Wilson		

ABSTRACT

Title: Nuclear Fuel Waste Projections in Canada – 2015 Update
Report No.: NWMO-TR-2015-19
Author(s): M. Garamszeghy
Company: Nuclear Waste Management Organization
Date: December 2015

Abstract

This summarizes the existing inventory of used nuclear fuel wastes in Canada as of June 30, 2015 and forecasts the potential future arisings from the existing reactor fleet as well as from proposed new-build reactors. The report focuses on power reactors, but also includes prototype, demonstration and research reactor fuel wastes held by AECL which are included in the NWMO mandate.

As of June 30, 2015, a total of approximately 2.6 million used CANDU fuel bundles (approx. 52,000 tonnes of heavy metal (t-HM)) were in storage at the reactor sites, an increase of approximately 88,000 bundles from the 2014 NWMO Nuclear Fuel Waste Projections report. For the existing reactor fleet, the total projected number of used fuel bundles produced to end of life of the reactors ranges from about 3.4 to 5.2 million used CANDU fuel bundles (approx. 69,000 t-HM to 103,000 t-HM), depending upon decisions to refurbish current reactors. The lower end is based on an average of 25 effective full power years (EFPY) of operation for each reactor (i.e. no additional refurbishment beyond what has already been completed), while the upper end assumes that most reactors are refurbished and life extended for an additional 25 EFPY of operation. This is unchanged from the 2014 report.

Based on currently announced refurbishment and life extension plans for the existing nuclear reactor fleet in Canada, the current reference scenario projects a total of 4.4 million bundles. For design and safety assessment purposes, the NWMO has assumed a reference used fuel inventory of 4.6 million CANDU fuel bundles from the existing reactor fleet.

Used fuel produced by potential new-build reactors will depend on the size and type of reactor and number of units deployed. New-build plans are at various stages of development and the decisions about whether to proceed with individual projects, reactor technology and number of units have not yet been made. If all of the units where formal licensing has already been initiated are eventually constructed (i.e. at Darlington, which was granted a site preparation licence by the Canadian Nuclear Safety Commission in 2012), the total additional quantity of used fuel from these reactors could be up to approximately 1.6 million CANDU fuel bundles (30,000 t-HM), or 10,800 PWR fuel assemblies (5,820 t-HM). This total is unchanged from the 2014 report.

When decisions on reactor refurbishment, new nuclear build and/or advanced fuel cycle technologies are made by the nuclear utilities in Canada, any resulting changes in forecasted inventory of nuclear fuel waste will be incorporated into future updates of this report.

TABLE OF CONTENTS

		Page
ABSTRACT	iii
1.	INTRODUCTION.....	1
1.1	BACKGROUND.....	1
1.2	PURPOSE.....	1
1.3	SCOPE.....	1
1.4	CHANGES SINCE THE 2014 REPORT.....	2
2.	INVENTORY FROM EXISTING REACTORS.....	3
2.1	CURRENT INVENTORIES.....	3
2.2	FUTURE FORECASTS.....	4
3.	INVENTORY FROM POTENTIAL NEW-BUILD REACTORS.....	6
3.1	PROJECTS CURRENTLY UNDERGOING REGULATORY APPROVALS.....	6
3.1.1	Ontario Power Generation.....	6
3.2	ADDITIONAL PROJECTS IN RECENT CONSIDERATION.....	8
3.3	SUMMARY OF NUCLEAR FUEL CHARACTERISTICS FROM NEW-BUILD REACTORS.....	8
4.	SUMMARY OF PROJECTED USED FUEL INVENTORY.....	11
	REFERENCES.....	13
	APPENDIX A: SUMMARY OF EXISTING CANADIAN REACTORS.....	15
	APPENDIX B: USED FUEL WASTE FORECAST DETAILS FOR EXISTING REACTORS.....	19
	APPENDIX C: DESCRIPTION OF FUEL TYPES.....	21
	C.1 FUELS FROM EXISTING REACTORS.....	22
	C.2 FUELS FROM POTENTIAL NEW-BUILD REACTORS.....	26

LIST OF TABLES

	Page
Table 1: Summary of Nuclear Fuel Waste in Canada as of June 30, 2015	3
Table 2: Summary of Projected Nuclear Fuel Waste from Existing Reactors.....	5
Table 3: Summary of Proposed New Reactors.....	6
Table 4: Summary of Fuel Types for Proposed New Reactors.....	9
Table 5: Summary of Potential Fuel Arisings from New Reactors at Darlington.....	10
Table A1: Nuclear Power Reactors.....	15
Table A2: Prototype and Demonstration Power Reactors	16
Table A3: Research Reactors.....	17
Table B1: Detailed Used Fuel Forecasts for Existing Reactors	20
Table C1: Summary of Inventory by Bundle Type (June 2015).....	21

LIST OF FIGURES

	Page
Figure 1: Summary of Used Fuel Wet and Dry Storage History	4
Figure 2: Summary of Projected Used Fuel Inventory	11
Figure A1: Current Nuclear Fuel Waste Storage Locations in Canada	16

1. INTRODUCTION

1.1 BACKGROUND

The Nuclear Waste Management Organization (NWMO) has a legal obligation to manage all of Canada's used nuclear fuel – that which exists now and that which will be produced in the future [Canada, 2002]. The NWMO continually monitors new developments to be prepared to assume its legal responsibility to manage used nuclear fuel in light of these evolving energy developments.

In recent years, interest in new nuclear generation has increased. New Brunswick, Ontario, Saskatchewan, and even Alberta (heretofore a “non-nuclear” province) have considered adding new nuclear capacity to their energy mix. In Ontario, OPG received a Site Preparation Licence from the Canadian Nuclear Safety Commission (CNSC) in 2012 for the construction of new reactors at Darlington. In its application, in addition to CANDU reactor designs, consideration is also being given to introducing light water reactors, a technology used elsewhere in the world that produces used nuclear fuel with characteristics different from those which Canadian nuclear operators now manage. (Note that the licence is currently the subject of a legal challenge and the Ontario Government has postponed the project due to economic and other reasons.) There is also the possibility of “small modular reactors” in remote locations.

Decisions on new nuclear reactors, advanced fuel cycles or other changes in energy choices will not be made by the NWMO. They will be taken by nuclear operators in conjunction with government and the regulators. However, it is important that the NWMO recognize these uncertainties and put in place an active process for ongoing monitoring and review of new developments so that it can plan for the long-term management of used fuel arising from such decisions. As part of this, the NWMO maintains a watching brief on alternative technologies [NWMO, 2013a, b].

As energy policy decisions are taken that substantially affect the amount and/or types of used fuel that the NWMO must manage, the ongoing engagement of Canadians on the social, ethical and technical appropriateness of the long-term management plans for these materials must be provided for. As part of continuing engagement of Canadians, the NWMO discusses with interested individuals and organizations how changing conditions, such as new-build, different fuel types or advanced fuel cycles should be addressed. The NWMO will continually review, adjust and validate implementation plans as appropriate against the changing external environment.

1.2 PURPOSE

The NWMO has made a commitment to publish information on current and future potential inventories of used fuel amounts and types on an annual basis [NWMO, 2013a]. This document is the sixth such annual report and provides an update to the 2014 version [Garamszeghy, 2014].

1.3 SCOPE

This report summarizes the existing inventory of used nuclear fuel wastes in Canada as of June 30, 2015 and forecasts the potential future arisings from the existing reactor fleet as well as

from proposed new-build reactors. The report focuses on power reactors, but also includes information on prototype, demonstration and research reactor fuel wastes held by AECL.

1.4 CHANGES SINCE THE 2014 REPORT

The primary changes to the Canadian nuclear landscape since the 2014 report are:

- a) The transformation of Atomic Energy of Canada Limited (AECL) operations into Canadian Nuclear Laboratories and the subsequent management contract let to a private consortium, Canadian National Energy Alliance (CNEA), under a “government owned, contractor operated” (GoCo) model. (Used nuclear fuel and other wastes remain under the ownership of AECL); and
- b) An increase in the total amount of used fuel currently in storage, due to another year of reactor operation.

The combined effects of these changes on the projected used fuel inventory are:

- a) An increase in the total amount of used fuel currently in storage from June 30, 2014 to June 30, 2015.

	June 30, 2014	June 30, 2015	Net change	
Wet storage	1,504,328	1,496,518	-7,810	bundles*
Dry storage	1,006,977	1,102,470	95,493	bundles
TOTAL	2,511,305	2,598,988	87,683	bundles

** Note: A negative number means more used fuel was transferred from wet to dry storage than was produced during the year.*

- b) No significant change in the overall projected future total number of used fuel bundles produced by the existing reactor fleet for the low scenario (3.4 million bundles), reference scenario (4.4 million bundles) and the high scenario (5.2 million bundles).

Additional considerations include

- a) The on-going legal challenges to the CNSC site preparation licence for OPG to construct new reactors at Darlington and the indefinite postponement by the Government of Ontario to build new reactors as well as the possibility of introducing small modular reactors in remote communities will affect the likelihood and timing of any used fuel from new-build reactors. In Sept 2015, the Federal Court of Appeal overturned a previous Federal Court ruling that the Environmental Assessment and site preparation licence was invalid and restored the original approval.
- b) Introduction of new fuel types, such as the 37M fuel bundle in the Bruce and Darlington reactors, will affect the future quantities of different fuel types from existing reactors.

2. INVENTORY FROM EXISTING REACTORS

2.1 CURRENT INVENTORIES

Table 1 summarizes the current inventory of nuclear fuel waste in Canada as of June 30, 2015. The inventory is expressed in terms of number of CANDU used fuel bundles and does not include fuel which is currently in the reactors (which is not considered to be “nuclear fuel waste” until it has been discharged from the reactors) or non-CANDU-like research fuels (see note 3).

Table 1: Summary of Nuclear Fuel Waste in Canada as of June 30, 2015

Location	Waste Owner	Wet Storage (# bundles)	Dry Storage (# bundles)	TOTAL (# bundles)	Current Status
Bruce A	OPG ⁽²⁾	327,078	149,376	476,454	- 4 units operational
Bruce B	OPG ⁽²⁾	360,690	275,702	636,392	- 4 units operational
Darlington	OPG	335,779	153,917	489,696	- 4 units operational
Douglas Point	AECL	0	22,256	22,256	- permanently shut down 1984
Gentilly 1	AECL	0	3,213	3,213	- permanently shut down 1978
Gentilly 2	HQ	32,801	97,140	129,941	- permanently shut down end of 2012
Pickering A	OPG	400,440	300,977	701,417	- 2 units operational, 2 units permanently shut down 2005
Pickering B	OPG				- 4 units operational
Point Lepreau	NBPN	39,730	92,700	132,430	- operational
Whiteshell	AECL	0	2,268	2,268	- permanently shut down 1985. See Note (1).
Chalk River	AECL	0	4,921	4,921	- mostly fuel from NPD (permanently shut down 1987) and with small amounts from other Canadian reactors and research activities.
		Note (3)	Note (3)	Note (3)	- currently under assessment
TOTAL		1,496,518	1,102,470	2,598,988	

Notes:

AECL = Atomic Energy of Canada Limited

HQ = Hydro-Québec

NBPN = New Brunswick Power Nuclear

OPG = Ontario Power Generation Inc.

(1) 360 bundles of Whiteshell fuel are standard CANDU bundles (from the Douglas Point reactor). The remaining bundles are various research, prototype and test fuel bundles, similar in size and shape to standard CANDU bundles, mainly from the research/prototype WR-1 reactor.

(2) Bruce reactors are leased to Bruce Power for operation. However, OPG is responsible for the used fuel that is produced.

(3) AECL also owns some ~22,000 components of research and development fuels such as fuel elements, fuel pellets and fuel debris in storage at Chalk River. While the total mass of these components is small compared to the overall quantity of CANDU fuel, their varied composition, storage form, dimensions, etc. requires special consideration for future handling. There are also small quantities (a few kg) of non-CANDU fuel associated with several research reactors in Canada.

Assuming a rounded average of 20 kg heavy metals in a fuel bundle, 2.6 million bundles is equivalent to approximately 52,000 tonnes of heavy metal (t-HM). Further details on the existing reactors can be found in Appendix A and fuel types in Appendix C.

Figure 1 summarizes the history of wet and dry storage of used fuel. Initially, all fuel was wet-stored in the station used fuel storage bays. As the bays filled up, older fuel was transferred to dry storage starting in the mid-1990s. In the future, the inventory in wet storage will remain relatively constant (since wet bay space is fixed), while the inventory in dry storage will continue to grow over time.

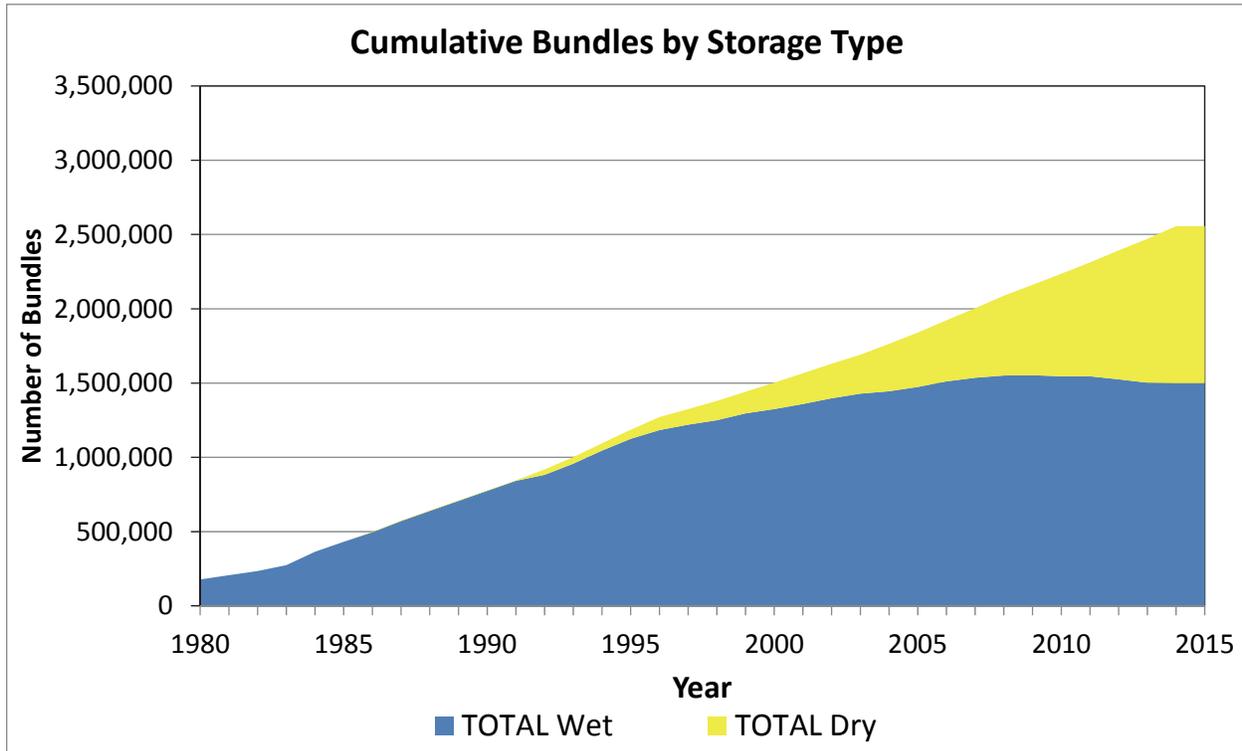


Figure 1: Summary of Used Fuel Wet and Dry Storage History

2.2 FUTURE FORECASTS

Forecasts of future nuclear fuel waste arisings are given in Table 2. Three scenarios are provided in the estimates:

- a) **Low:** the reactors are shut down at the end of the projected life of the fuel channels (i.e. nominal 25 effective full power years (EFPY) of operation), with existing completed refurbishments and some planned life extension maintenance activities. Under this scenario, Darlington, Bruce A Units 3 and 4 as well as Bruce B will not be refurbished. Pickering reactors will begin to shut down in 2018.
- b) **Reference:** based on announced life plans for the reactor fleet (i.e. refurbishment or not). Under this scenario, Darlington and Bruce A Units 3 and 4 will be refurbished. Bruce B will not be. Bruce A Units 1 and 2 as well as Point Lepreau have already been refurbished and will operate until the new pressure tubes have accumulated 25 EFPY. Pickering reactors will be run until 2020.
- c) **High:** Darlington, Bruce A Units 3 and 4 and Bruce B are all refurbished with a new set of pressure tubes and other major components, then operated for a further nominal 25 EFPY. Bruce A Units 1 and 2 as well as Point Lepreau have already been refurbished and

will operate until the new pressure tubes have accumulated 25 EFPY. Pickering reactors will be run until 2020.

Pickering units 2 and 3 as well as Gentilly-2 are permanently shutdown and will not be restarted under any of the scenarios.

Note that these scenarios are constructed for NWMO planning purposes only to provide a range of possible fuel arisings and may differ from the official business plans and operational assumptions of the reactor operators. Operation of the reactors, including whether or not to refurbish or life extend, are subject to future business planning decisions of the individual reactor operators. Forecasts are expressed in terms of number of used CANDU fuel bundles and are rounded to nearest thousand bundles. Detailed planning dates for each scenario and reactor are provided in Appendix B.

Table 2: Summary of Projected Nuclear Fuel Waste from Existing Reactors

Location	Waste Owner	Total June 2015 (# bundles)	Typical Annual Production (# bundles)	Low Scenario (# bundles)	Reference Scenario (# bundles)	High Scenario (# bundles)
Bruce A	OPG	476,454	20,500 ⁽¹⁾	820,000	1,143,000 ⁽⁴⁾	1,143,000 ⁽⁴⁾
Bruce B	OPG	636,392	23,500 ⁽¹⁾	766,000	766,000	1,495,000
Darlington	OPG	489,696	22,000 ⁽¹⁾	633,000	1,293,000	1,293,000
Douglas Point	AECL	22,256	0 ⁽²⁾	22,256	22,256	22,256
Gentilly 1	AECL	3,213	0 ⁽²⁾	3,213	3,213	3,213
Gentilly 2	HQ	129,941	0 ⁽²⁾	129,941	129,941 ⁽⁸⁾	129,941 ⁽⁸⁾
Pickering A	OPG	701,417	7,200 ⁽³⁾	789,000	800,000 ⁽⁵⁾	800,000 ⁽⁵⁾
Pickering B	OPG		14,500 ⁽¹⁾			
Point Lepreau	NBPN	132,430	4,800	260,000	260,000 ⁽⁷⁾	260,000 ⁽⁷⁾
Whiteshell	AECL	2,268	0 ⁽²⁾	2,268	2,268	2,268
Chalk River	AECL	4,921	0 ⁽⁶⁾	4,921	4,921	4,921
TOTAL (bundles)⁽⁹⁾		2,598,988	92,500	3,431,000	4,425,000	5,154,000
(t-HM)⁽¹⁰⁾		52,000	1,850	69,000	89,000	103,000

Notes:

- 1) Based on 4 reactors operating.
- 2) Reactor is permanently shut down and not producing any more fuel.
- 3) Based on 2 reactors operating.
- 4) All units at Bruce A are assumed to be refurbished (refurbishment completed for 2 units in 2012).
- 5) Pickering reactors assumed to be operated until 2020 only.
- 6) Future forecasts do not include research fuels. Chalk River does not produce any CANDU power reactor used fuel bundles. However, it may receive bundles from power reactor sites from time to time for testing. This will not affect overall total numbers of bundles, since they will be subtracted from the reactor site.
- 7) Point Lepreau has completed refurbishment and re-started in 2012.
- 8) Gentilly-2 was permanently shut down on Dec 28, 2012. Defuelling was completed in 2013.
- 9) Totals may not add exactly due to rounding to nearest 1,000 bundles for future forecasts.
- 10) "tonnes of heavy metals" (t-HM) includes uranium and all of the transuranic isotopes produced in the reactor as part of the nuclear reactions via various neutron activation and radioactive decay processes.

3. INVENTORY FROM POTENTIAL NEW-BUILD REACTORS

There are two categories of proposed new reactor projects:

- a) projects which have received or are currently undergoing regulatory approvals; and
- b) potential projects which have been discussed by various implementing organizations (proponents), but which do not have any regulatory approvals underway.

This report focuses on the first category. However, it does not assess the probability of any of these projects proceeding. Execution of the projects rests entirely with the proponent. In addition, the technologies for each project have not yet been selected. Until such decisions have been made by the proponents, the forecast regarding types and amounts of fuel resulting from new-build projects is highly speculative.

Table 3: Summary of Proposed New Reactors

Proponent	Location	In-service timing	Reactor Type(s)	Status
Projects currently undergoing regulatory approvals				
OPG	Darlington, Ontario	Originally planned first unit 2018. Due to the current stage of the reactor type selection process and the subsequent construction schedules, the first unit would not likely be operational until the mid to late 2020s. (see note 1)	4 x EC-6 or 4 x AP1000 or (see note 2)	Selected as site for first 2 reactors by Ontario Government EIS report & updated application for a site preparation licence was submitted Sept 30, 2009 for 4 reactor types. [OPG, 2009] Joint Panel Review public hearing conducted in 2011 and report issued on EIS, Aug 2011 [JRP, 2011]. Site Preparation Licence issued by CNSC Aug 2012 [CNSC, 2012], suspended by court challenge May 2014 [Federal Court of Canada, 2014], and restored by appeal in Sept 2015 [Federal Court of Appeal, 2015] EC-6 and AP1000 under detailed consideration [OPG, 2012].

Notes:

- 1) The selection of reactor type for new-build in Ontario was to be made by Ontario Government (Infrastructure Ontario) in 2009. The procurement process was suspended in June 2009 until further notice [Infrastructure Ontario, 2009], resumed in 2012, and then suspended again in October 2013 [CTV, 2013].
- 2) In June 2012, OPG issued contracts to Candu Inc and Westinghouse for more detailed cost estimates on the EC-6 and AP1000, respectively [OPG, 2012]. The procurement process was

3.1 PROJECTS CURRENTLY UNDERGOING REGULATORY APPROVALS

3.1.1 Ontario Power Generation

OPG is currently in the licensing process for building up to 4 new reactors at its Darlington site, in Clarington just east of Toronto [OPG, 2007]. The Darlington site had been selected by the

Government of Ontario to host the first two new-build reactors in the province, with an original reference in service date of 2018. If the project goes ahead, the first unit is not likely to be in-service until the mid to late 2020s due to subsequent suspension of the procurement process. The Environmental Impact Statement (EIS), which was submitted in 2009, was based on the maximum physical capacity of the site to allow for possible future expansion. A Joint Panel Review concluded in 2011, including public hearings. In August 2011, the Joint Review Panel issued its report on the environmental assessment (EA) with a conclusion that “the project is not likely to cause significant adverse environmental effects, provided the mitigation measures proposed and commitments made by OPG during the review, and the Panel’s recommendations are implemented” [JRP, 2011]. A Site Preparation Licence was granted by the CNSC on August 17, 2012 [CNSC, 2012]. In May 2014, a group of environmental organizations had the approval overturned in a court challenge [Federal Court of Canada, 2014]. This ruling was subsequently overturned itself by a Federal Court of Appeal ruling in Sept 2015 which restored the original approval [Federal Court of Appeal, 2015]. The procurement process is currently suspended. However, the Ontario Government has stated that new nuclear remains an option for the future [Ontario, 2013].

Four reactor types were considered in the EIS submission:

- a) **CANDU ACR 1000 (Advanced CANDU reactor)**, which is a 1085 MW(e) net heavy water moderated, light water cooled pressure tube reactor. Up to 4 ACR 1000 reactors would be built on the site in two twin unit pairs. This would result in a total lifetime production of approximately 770,400 used fuel bundles (12,480 t-HM) over 60 years.
- b) **CANDU EC-6 (Enhanced CANDU 600 reactor)**, which is a 686 MW(e) net heavy water reactor, similar to the existing CANDU 600 reactors at Gentilly-2, Point Lepreau and elsewhere in the world. Up to 4 EC-6 reactors would be built on the site in two twin unit pairs. This would result in a total lifetime production of approximately 1,572,000 used fuel bundles (30,000 t-HM) over 60 years.
- c) **Westinghouse AP1000**, which is a 1037 MW(e) net pressurized light water reactor (PWR). Up to 4 AP1000 reactors would be built on the site, which would result in a total lifetime production of approximately 10,800 PWR fuel assemblies (5,820 t-HM) over 60 years.
- d) **AREVA EPR (Evolutionary Power Reactor)**, which is a 1580 MW(e) net PWR. Up to 3 EPR reactors would be built on the site, which would result in a total lifetime production of approximately 9,900 PWR fuel assemblies (5,220 t-HM) over 60 years.

All four reactor designs are considered to be “Generation III+”, and are designed to operate for 60 years. The province, through its Infrastructure Ontario program, will be selecting the preferred vendor. This selection process was suspended in June 2009 [Infrastructure Ontario, 2009]. In June 2012, OPG announced that they had contracted with Candu Inc and Westinghouse to prepare detailed cost estimates for implementing the EC-6 and the AP1000, respectively, at the Darlington site [OPG, 2012]. The Nuclear Power Reactor Site Preparation Licence issued by the CNSC to OPG has a validity of 10 years [CNSC, 2012]. This timeframe allows a reactor vendor to be chosen prior to commencing the site preparation work. However, in October 2013, the procurement process was again suspended [CTV, 2013]. For the purposes of forecasts in this report only, it is assumed that the project will eventually proceed in some form and the first unit is assumed to be in operation in 2025. Any decision to resurrect the project and proceed in the future will be made by the Province of Ontario.

The EC-6 uses standard CANDU fuel, with options for advanced fuel types (SEU, MOX, etc). As described below in Section 3.3 (with further details in Appendix C), the other three reactor types operate with enriched uranium fuel. The ACR 1000 fuel is similar in size and shape to existing CANDU fuel bundles. The AP1000 and EPR fuel assemblies are considerably different from the CANDU fuels in terms of size and mass, but are very similar to conventional pressurized light water reactor fuels used in many other countries around the world.

3.2 ADDITIONAL PROJECTS IN RECENT CONSIDERATION

Feasibility studies and public discussions by provincial governments and potential proponents have been previously conducted for other new reactors in Ontario [Bruce Power, 2008a, 2008c, 2009a], Alberta [Bruce Power, 2009b], Saskatchewan [Saskatchewan, 2011] and New Brunswick [MZConsulting, 2008], [AREVA, 2010].

Other proposals include the introduction of small modular reactors (SMRs) of up to a few tens of megawatts each in remote (i.e. off-grid) communities and resource extraction sites which currently rely on small-scale fossil fuel generating plants to provide heat and/or electricity [AECL, 2012]. The reactors are based on a variety of non-CANDU technologies, including liquid metal cooled, molten salt cooled and light water cooled.

There are currently no active environmental assessments or licence applications underway for any of these projects or proposals. However, the NWMO will continue to monitor the situation and will evaluate the implications and options for any new reactors as part of the review of the Adaptive Phased Management approach.

3.3 SUMMARY OF NUCLEAR FUEL CHARACTERISTICS FROM NEW-BUILD REACTORS

Table 4 presents a summary of the major characteristics and quantities of nuclear fuels that are used in the new-build reactor types that have been proposed in various projects. Further details can be found in Appendix C. The data have been extracted from references [Bruce Power, 2008a], [Bruce Power, 2008c], [IAEA, 2004] and [JRP, 2011]. Note that various other sources of data may quote different numbers for fuel properties and used fuel production rates. This is generally due to the preliminary nature of some of the designs combined with the various ways some of the reactors can be operated (e.g. enrichment level and burnup, assumed capacity factors, length of operating period between re-fuelling outages for light water reactors, conservative assumptions used for environmental assessment purposes, etc.). The quantities and characteristics used for forecasting in this report will be updated as reactor types are selected and their designs are further defined.

Table 5 summarizes the total quantity of used fuel that might be produced for the proposed new-build reactors at Darlington. As mentioned above, until decisions on reactor types, number of units and operating conditions are taken by the proponents, these forecasts remain highly speculative.

The total additional quantity of used fuel from the Darlington New Nuclear Project could be up to 1.6 million CANDU fuel bundles (30,000 t-HM), or 10,800 PWR fuel assemblies, depending on the selected reactor type.

Table 4: Summary of Fuel Types for Proposed New Reactors

Parameter	ACR 1000	EC-6	AP1000	EPR
Reactor Type	Horizontal pressure tube, heavy water moderated, light water cooled	Horizontal pressure tube, heavy water moderated and cooled	Pressurized light water reactor (PWR)	Pressurized light water reactor (PWR)
Net / Gross Power [MW(e)]	1085 / 1165	686 / 745	1037 / 1117	1580 / 1770
Design Life	60 years	60 years	60 years	60 years
Fuel type	CANFLEX ACR fuel bundle	37 element CANDU bundle	Conventional 17x17 PWR fuel design	Conventional 17x17 PWR fuel design
Fueling method	On power	On power	Refueling shutdown every 12 to 24 months and replace portion of the core	Refueling shutdown every 12 to 24 months and replace portion of the core
Fuel enrichment	Up to 2.5% for equilibrium core	Natural U, with options for SEU (1.2%) and MOX	2.4-4.5% avg initial core 4.8% avg for reloads	Up to 5% for equilibrium core
Fuel dimensions	102.49 mm OD x 495.3 mm OL	102.49 mm OD x 495.3 mm OL	214 mm square x 4795 mm OL	214 mm square x 4805 mm OL
Fuel assembly U mass [kg initial U]	16.2	19.2	538.3	527.5
Fuel assembly total mass [kg]	21.5	24.0	789	780
# of fuel assemblies per core	6,240	4,560	157	241
Fuel load per core [kg initial U]	101,088	87,552	84,513	127,128
Annual used fuel production [t-HM/yr per reactor]	52	126	24	29
Annual used fuel production [number of fuel assemblies/yr per reactor]	3,210	6,550	45	55
Lifetime used fuel production [t-HM per reactor]	3,120	7,500	1,455	1,740
Lifetime used fuel production [number of fuel assemblies per reactor]	192,600	393,000	2,700	3,300

Note: Data extracted from references [Bruce Power, 2008a, 2008c], [IAEA, 2004] and [JRP, 2011]. Annual and lifetime data have been rounded.

Table 5: Summary of Potential Fuel Arisings from New Reactors at Darlington

Reactor	Darlington New Nuclear
Expected operation	2020s to 2080s
EC-6	
# of reactor units	4
Quantity of fuel (# bundles)	1,572,000
(t-HM)	30,000
AP 1000	
# of reactor units	4
Quantity of fuel (# assemblies)	10,800
(t-HM)	5,820

These total projections have not changed from the previous forecasts. However, the sale of AECL to Candu Inc. (a private company) in 2011 may affect the future development of reactor types in Canada (e.g. choice of EC-6 versus ACR).

For NWMO planning purposes, a conservative, but reasonable, projection for new-build is based on four EC-6 reactors at Darlington. This is the only project that has currently received an initial regulatory approval (i.e. site preparation licence) and, of the technologies under consideration, the EC-6 reactor will produce the most used nuclear fuel over its lifetime for this project (1.6 million bundles for 4 reactors, compared to 0.8 million bundles for 4 ACR reactors).

4. SUMMARY OF PROJECTED USED FUEL INVENTORY

The projected inventory from current reactor operations, reactor refurbishment, and potential new reactors, developed in Sections 2 and 3, is summarized in Figure 2.

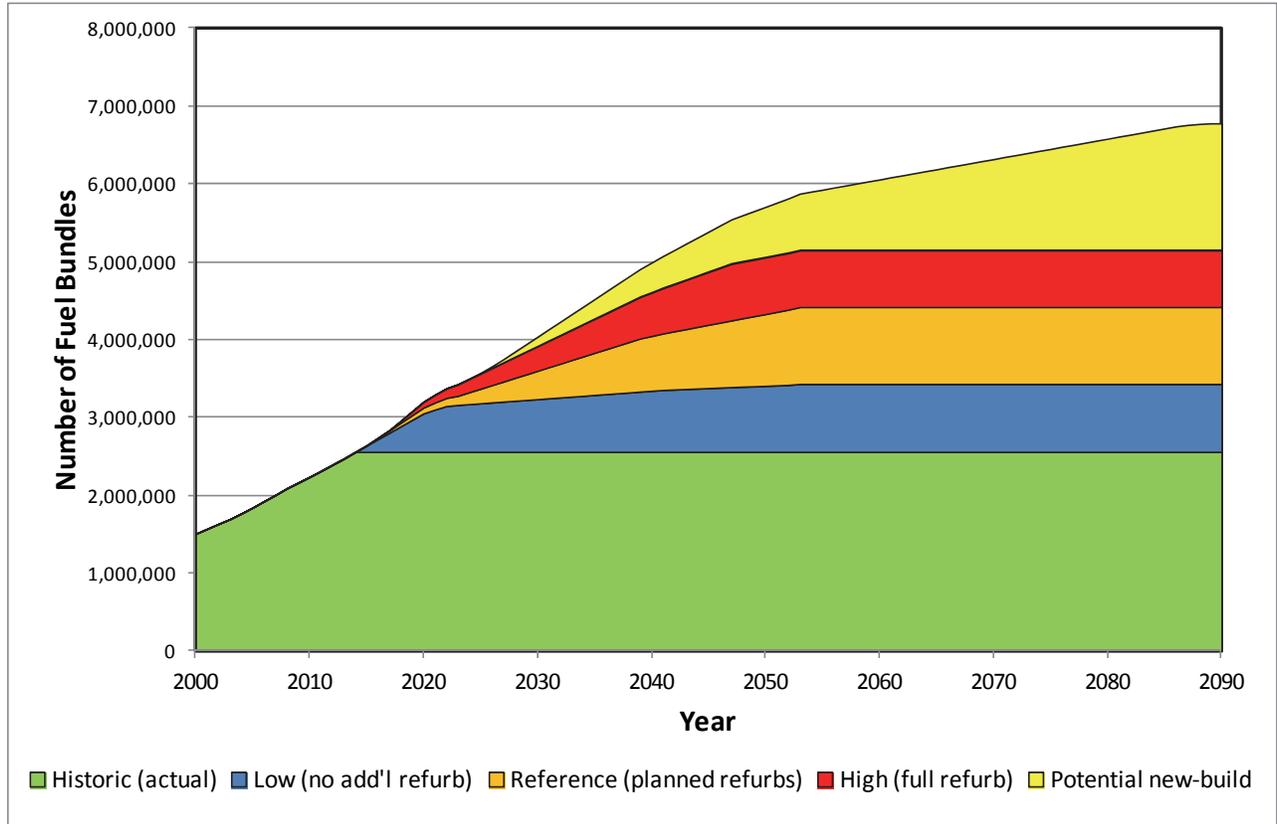


Figure 2: Summary of Projected Used Fuel Inventory

The “low forecast” (blue shaded area) represents the inventory from the existing Canadian fleet of reactors, up to the end of their initial operating period (nominal 25 effective full power years or announced shutdown dates), including currently executed life-extension activities, but prior to any additional major refurbishment (e.g. large scale fuel channel replacement or steam generator replacement). Previously refurbished and re-started reactors (Bruce A1, Bruce A2 and Point Lepreau) are assumed to operate for an additional nominal 25 effective full power years. This amounts to a total of approximately 3.4 million CANDU fuel bundles, of which 2.6 million bundles already exist in storage as of June 2015.

The “reference forecast” (orange shaded area) represents the additional fuel bundles that would be generated if all of the currently announced refurbishment and life extension projects for the existing Canadian reactor fleet are implemented. This amounts to an additional approximately 1.0 million CANDU fuel bundles, for a total of 4.4 million CANDU fuel bundles.

The “high forecast” (red shaded area) represents the additional used fuel bundles that would be generated if all of the existing Canadian reactor fleet is refurbished and life extended for another nominal 25 effective full power years of operation (except Pickering, which is planned to be shut

down by 2020 and Gentilly-2, which was permanently shut down at the end of 2012). This amounts to an additional approximately 0.8 million CANDU fuel bundles, for a total of 5.2 million CANDU fuel bundles.

Note that not all of the existing reactors may be refurbished and the decisions over whether or not to refurbish reactors will be taken by their owner/operators on a case-by-case basis over the next few years.

The “potential new-build” (yellow shaded area) represents the additional used fuel bundles that could be generated if four new EC-6 reactors are constructed (i.e. the four currently undergoing licensing at Darlington), amounting to approximately 1.6 million bundles over their projected 60 year operating life. This quantity and timing is highly speculative at this time, since decisions regarding potential new reactor numbers, types and in-service dates have not yet been taken. It will also depend on the operating history of the new reactors, such as capacity factors and achieved fuel burnup. Other potential future new-builds include small modular reactors based on a variety of non-CANDU technologies, including liquid metal cooled, molten salt cooled and light water cooled.

Based on currently announced refurbishment and life extension plans for the existing nuclear reactor fleet in Canada, the current reference scenario projects a total of 4.4 million bundles (see Appendix B for details). For design and safety assessment purposes, the NWMO has assumed a reference used fuel inventory of 4.6 million CANDU fuel bundles from the existing reactor fleet. For the purposes of developing overall APM program cost estimates, a range with a low of 3.6 million and a high of 7.2 million CANDU fuel bundles is used.

When definitive decisions on new nuclear build and reactor refurbishment are made by the nuclear utilities in Canada, any resulting changes in forecasted inventory of nuclear fuel waste will be incorporated into future updates of this report.

Note that in addition to the CANDU fuel bundles described above, there are (generally small) quantities of other nuclear fuel waste, such as the AECL research fuels, pellets and elements mentioned in the footnotes to Table 1, as well as used fuels from other Canadian research reactors (as listed in the Appendix, Table A-3), which are included within the NWMO’s mandate for implementing the APM program, if requested by the waste owner. (Some of these non-CANDU power reactor fuels have been or will be returned to the country of origin, e.g. USA or France, under the terms of the original supply agreements or international agreements governing their usage).

There are also other heat-generating radioactive wastes in Canada (such as cobalt-60 sources produced in Canadian CANDU reactors and used in industrial and therapeutic radiation devices), again in relatively small quantities (on the order of 1,000 to 2,000 fuel bundle equivalents, i.e. less than 0.1% of the projected used fuel inventory). Note that these additional non-fuel, heat generating wastes are not within the NWMO’s legislated mandate for used fuel waste.

REFERENCES

- AECL. 2012. AECL Nuclear Review, Volume 1, Number 2, December 2012. Available at www.aecl.ca/site/media/Parent/ANR_1-2_ENG.pdf.
- Areva. 2010. "AREVA signs agreement for third clean energy park project", Areva news release, July 8, 2010. Available at www.areva.com.
- Bruce Power. 2008a. Bruce New Nuclear Power Plant Project Environmental Assessment – Environmental Impact Statement. Bruce Power. Available at www.brucepower.com
- Bruce Power. 2008b. Report on Bruce Power's Feasibility Study. Bruce Power. Available at www.brucepower.com
- Bruce Power. 2008c. Bruce New Nuclear Power Plant Project Environmental Assessment – Bounding Plant Envelope Technical Support Document. Bruce Power. Available at www.brucepower.com
- Bruce Power. 2009a. "Bruce Power to Focus on Additional Refurbishments at Bruce A and B; Bruce C and Nanticoke new-build applications withdrawn", Bruce Power news release, July 23, 2009. Available at www.brucepower.com
- Bruce Power. 2009b. Withdrawal of Application for Approval to Prepare a Site for the Future Construction of a Nuclear Power Generating Facility Municipal District of Northern Lights, Alberta. Bruce Power Alberta submission to the Canadian Nuclear Safety Commission, January 2009. Available at www.nuclearsafety.gc.ca
- Canada. 2002. Nuclear Fuel Waste Act, S.C. 2002, c. 23. Available at laws-lois.justice.gc.ca/eng/acts/n-27.7/index.html
- CNSC. 2012. Record of Proceedings, Including Reasons for Decision, in the Matter of Ontario Power Generation Inc. Application for the Issuance of a Licence to Prepare Site for a New Nuclear Power Plant at the Darlington Nuclear Site, August 2012. Available at www.nuclearsafety.gc.ca
- CTV. 2013. "Ontario kills plan for 2 new nuclear plants; will rebuild existing reactors" toronto.ctvnews.ca/ontario-kills-plan-for-2-new-nuclear-plants-will-rebuild-existing-reactors-1.1492006
- Federal Court of Appeal. 2015. Ontario Power Generation Inc. (Appellant) and Greenpeace Canada, Lake Ontario Waterkeeper, Northwatch and Canadian Environmental Law Association (Respondents), 2015 FCA 186 - Reasons for Judgment and Judgment. Available at www.nuclearsafety.gc.ca/eng/pdfs/2010-09-10-federal-court-of-appeal-reasons.pdf.
- Federal Court of Canada. 2014. Greenpeace Canada v. Attorney General of Canada, 2014 FC 463 - Reasons for Judgment and Judgment. Available at: www.canlii.org/en/ca/fct/doc/2014/2014fc463/2014fc463.pdf
- Garamszeghy, M., 2014. Nuclear Fuel Waste Projections in Canada – 2014 Update. December, 2014. Nuclear Waste Management Organization report NWMO TR-2014-16. Available at www.nwmo.ca
- Hydro Québec. 2012. Hydro-Québec confirms Gentilly-2 closure at the end of 2012. Hydro Québec news release, October 3, 2012. Available at www.hydroquebec.com/media
- Infrastructure Ontario. 2009. "Ontario Suspends Nuclear Procurement", Infrastructure Ontario news release, June 29, 2009. Available at www.infrastructureontario.ca

- International Atomic Energy Agency (IAEA). 2004. Status of advanced light water reactor designs. IAEA report IAEA-TECDOC-1391. Available at www.iaea.org
- JRP. 2011. Joint Review Panel Environmental Assessment Report, Darlington New Nuclear Power Plant Project, August 2011. Available at www.acee-ceaa.gc.ca
- MZConsulting. 2008. Viability Study for New Nuclear Facilities in New Brunswick. Report prepared for the Government of New Brunswick by MZConsulting. Available at www.qnb.ca/0085/Documents/Executive%20SummaryMZC.doc
- NWMO. 2013a. Implementing Adaptive Phased Management 2013 to 2017. March 2013. Nuclear Waste Management Organization report NWMO-REP-06411-30605. Available at www.nwmo.ca
- NWMO. 2013b. Watching Brief on Reprocessing, Partitioning and Transmutation - 2013 Update. Nuclear Waste Management Organization. Available at: www.nwmo.ca/adaption/
- Ontario. 2013. Achieving Balance: Ontario's Long-Term Energy Plan. Ontario Ministry of Energy. Available at: www.energy.gov.on.ca/docs/LTEP_2013_English_WEB.pdf
- OPG. 2007. Project Description for the Site Preparation, Construction and Operation of the Darlington B Nuclear Generating Station Environmental Assessment. Ontario Power Generation report submitted to the Canadian Nuclear Safety Commission. Available at www.opg.com
- OPG. 2009. "OPG Submits Documents for the Federal Approvals Process in Support of New Nuclear at the Darlington Site", OPG news release, September 30, 2009. Available at www.opg.com
- OPG. 2010. "Strategy announced for nuclear investment in the Durham Region: Pickering B to Enter Final Decade of Operation with \$300-Million Investment", OPG news release, February 16, 2010. Available at www.opg.com
- OPG. 2012. "OPG Signs Services Agreements for New Nuclear", OPG news release, June 22, 2012. Available at www.opg.com
- Saskatchewan. 2011. "Saskatchewan and Hitachi sign nuclear R&D agreements", Government of Saskatchewan news release, August 25, 2011. Available at www.gov.sk.ca

APPENDIX A: SUMMARY OF EXISTING CANADIAN REACTORS

Table A1: Nuclear Power Reactors

Location	Rating (MW(e) net)	Year In-service	Fuel Type*	Current Status
Bruce Nuclear Power Development, Ontario				
Bruce A – 1	750	1977	37 element CANDU bundle	Refurbished and operating
Bruce A – 2	750	1977		Refurbished and operating
Bruce A – 3	750	1978		Operating
Bruce A – 4	750	1979		Operating
Bruce B – 5	795	1985	37 element CANDU bundle; 37 element “long” bundle; (option for 43 element CANFLEX LVRF bundle)	Operating
Bruce B – 6	822	1984		Operating
Bruce B – 7	822	1986		Operating
Bruce B – 8	795	1987		Operating
Darlington, Ontario				
Darlington 1	881	1992	37 element CANDU bundle; 37 element “long” bundle	Operating
Darlington 2	881	1990		Operating
Darlington 3	881	1993		Operating
Darlington 4	881	1993		Operating
Gentilly, Quebec				
Gentilly 2	635	1983	37 element CANDU bundle	Permanently shut down in 2012
Pickering, Ontario				
Pickering A – 1	515	1971	28 element CANDU bundle	Operating
Pickering A – 2	515	1971		Permanently shut down in 2005
Pickering A – 3	515	1972		Permanently shut down in 2005
Pickering A – 4	515	1973		Operating
Pickering B – 5	516	1983		Operating
Pickering B – 6	516	1984		Operating
Pickering B – 7	516	1985		Operating
Pickering B – 8	516	1986		Operating
Point Lepreau, New Brunswick				
Point Lepreau	635	1983	37 element CANDU bundle	Refurbished and operating

*Note: refer to Appendix C for description of fuel types

Table A2: Prototype and Demonstration Power Reactors

Location	Rating (MW(e) net)	Year In-service	Fuel Type	Current Status
Bruce Nuclear Power Development, Ontario				
Douglas Point (CANDU PHWR prototype)	206	1968	19 element CANDU bundle	Permanently shut down in 1984; All fuel currently in dry storage on site
Gentilly, Quebec				
Gentilly 1 (CANDU-BLW boiling water reactor prototype)	250	1972	18 element CANDU-BLW bundle	Permanently shut down in 1978; All fuel currently in dry storage on site
Rolphton, Ontario				
NPD (CANDU PHWR prototype)	22	1962	19 element CANDU bundle; various prototype fuel designs (e.g. 7 element bundle)	Permanently shut down in 1987; All fuel currently in dry storage at Chalk River



Figure A1: Current Nuclear Fuel Waste Storage Locations in Canada

Table A3: Research Reactors

Location	Rating (MW(th))	Year In-service	Fuel Type	Comments
Chalk River, Ontario				
NRU	135	1957	various driver fuel and target designs (U-metal, U-Al, UO ₂ , U ₃ Si-Al)	Operating
ZED-2	0.00025	1960	U-metal fuel pins	Operating
NRX	42	1947	various driver fuel and target designs (U-metal, U-Al, UO ₂)	Permanently shut down in 1992
MAPLE 1	10	-	U ₃ Si-Al driver fuel; U-metal targets	Never fully commissioned
MAPLE 2	10	-		
Whiteshell, Manitoba				
WR-1 (organic cooled reactor prototype)	60	1965	various research and prototype fuel bundle designs (similar size and shape to standard CANDU bundles; UO ₂ , UC)	Permanently shut down in 1985; All fuel currently in dry storage on site
Hamilton, Ontario				
McMaster University	5	1959	LEU U ₃ Si-Al fuel pins	MTR Pool type reactor; Operating
Kingston, Ontario				
Royal Military College	0.02	1985	UO ₂ SLOWPOKE fuel pins	20 kW(th) SLOWPOKE 2; Operating
Montreal, Quebec				
Ecole polytechnique	0.02	1976	UO ₂ SLOWPOKE fuel pins	20 kW(th) SLOWPOKE 2; Operating
Edmonton, Alberta				
University of Alberta	0.02	1977	U-Al SLOWPOKE fuel pins	20 kW(th) SLOWPOKE 2; Operating
Saskatoon, Saskatchewan				
Saskatchewan Research Council	0.02	1981	U-Al SLOWPOKE fuel pins	20 kW(th) SLOWPOKE 2; Operating

Note: the SLOWPOKE reactors use U-235 enriched fuel and can operate on one fuel charge for 20 to 40 years. The total mass of U-235 fuel in a SLOWPOKE reactor core is about one kilogram. Other former research reactors include the 2 MW(th) SLOWPOKE Demonstration Reactor at Whiteshell, the low power PTR and ZEEP reactors at Chalk River, and shut down / decommissioned SLOWPOKE reactors at University of Toronto, Dalhousie University and Nordion Kanata. Used fuel from these shut down research reactors is stored at the Chalk River site, Whiteshell site or has been returned to the country of origin (e.g. US).

APPENDIX B: USED FUEL WASTE FORECAST DETAILS FOR EXISTING REACTORS

Forecasts are based on:

Existing stations only (new-build not considered).

[(June 2015 actuals) + (number of years from June 2015 to end-of-life) * (typical annual production of fuel bundles)] rounded to nearest 1000 bundles.

End-of-life total includes final reactor core fuel.

For multi-unit stations, the station total forecast is the sum of the above calculated on a unit-by-unit basis.

Total mass of fuel is based on a rounded bundle mass of 20 kg of heavy metals (e.g. uranium).

End-of-life dates are determined from the following scenario details:

a) **“Low” scenario:**

- the reactors are shut down at the end of the projected life of the fuel channels (i.e. nominal 25 effective full power years (equivalent to nominal 30 calendar years) of operation);
- reactors that have been permanently shut down do not restart (Gentilly-2, Pickering Units 2 and 3); and
- reactors that have been previously refurbished and are still operating, will operate to the end of their expected extended service life (Bruce Units 1 and 2; Point Lepreau).

b) **“Reference” scenario:**

- Based on currently announced life plans for the reactor fleet (i.e. refurbishment and life extension of all reactors except Gentilly-2, Pickering and Bruce B).

c) **“High” scenario:**

- all reactors (except those mentioned below) are refurbished with a new set of pressure tubes and other major components, then operated for a further nominal 25 effective full power years (nominal 30 calendar years) to a total of 60 calendar years;
- reactors that have been permanently shut down do not restart (Gentilly-2, Pickering Units 2 and 3);
- reactors that have been previously refurbished and are still operating, will operate to the end of their expected extended service life (Bruce Units 1 and 2; Point Lepreau); and
- reactors where a definite decision has been made not to refurbish (Pickering B), will operate to the end of their current announced service life only.

Note that forecasts are based on the above assumptions for NWMO planning purposes only and may differ from the business planning assumptions used by the reactor operators. In addition, as definitive decisions on refurbishment are taken by the reactor operators, the “high” and “low” scenarios will merge into the “reference” scenario in the future.

Table B1: Detailed Used Fuel Forecasts for Existing Reactors

Location	Unit	Startup	Total to June 2015 (# bundles)	Annual Production (# bundles)	Low Scenario (~25 EFY)		Reference Scenario		High Scenario (~50 EFY)	
					End-of-life	(# bundles)	End-of-life	(# bundles)	End-of-life	(# bundles)
Bruce A	1	1977	476,454	20,500	2042	820,000	2042	1,143,000	2042	1,143,000
	2	1977			2043		2043		2043	
	3	1978			2022		2053		2053	
	4	1979			2022		2054		2054	
Bruce B	5	1985	636,392	23,500	2021	766,000	2021	766,000	2052	1,495,000
	6	1984			2021		2021		2052	
	7	1986			2021		2021		2052	
	8	1987			2021		2021		2052	
Darlington	1	1992	489,696	22,000	2022	633,000	2052	1,293,000	2052	1,293,000
	2	1990			2020		2050		2050	
	3	1993			2023		2053		2053	
	4	1993			2023		2053		2053	
Douglas Point		1968	22,256	0	1984	22,256	1984	22,256	1984	22,256
Gentilly 1		1972	3,213	0	1978	3,213	1978	3,213	1978	3,213
Gentilly 2		1983	129,941	0	2012	129,941	2012	129,941	2012	129,941
Pickering A	1	1971	701,417	7,200	2020	789,000	2020	800,000	2020	800,000
	2	1971			2005		2005		2005	
	3	1972			2005		2005		2005	
	4	1973			2020		2020		2020	
Pickering B	5	1983	14,500	14,500	2019	789,000	2020	800,000	2020	800,000
	6	1984			2020		2020		2020	
	7	1985			2020		2020		2020	
	8	1986			2020		2020		2020	
Point Lepreau		1983	132,430	4,800	2041	260,000	2041	260,000	2041	260,000
Whiteshell		1965	2,268	0	1985	2,268	1985	2,268	1985	2,268
Chalk River/ NPD/other			4,921	0		4,921		4,921		4,921
TOTALS (bundles)			2,598,988	92,500		3,431,000		4,425,000		5,154,000
(t-HM)			52,000	1,850		69,000		89,000		103,000

Reactor currently under refurbishment

Reactor permanently shut down

Reactor previously refurbished

Note: forecasts are rounded to nearest 1,000 bundles
or 1,000 t-HM

APPENDIX C: DESCRIPTION OF FUEL TYPES**Table C1: Summary of Inventory by Bundle Type (June 2015)**

CANDU Bundle Type	Wet Storage (# bundles)	Dry Storage (# bundles)	TOTAL (# bundles)
18 Element	-	4,417	4,417
19 Element	-	26,296	26,296
28 Element	400,440	300,977	701,417
37 R	856,149	735,312	1,591,461
37 R Long	205,916	33,523	239,439
37 M	19,707	-	19,707
37 M Long	14,282	-	14,282
43 Element	24	-	24
Other	-	1,945	1,945
TOTAL	1,496,518	1,102,470	2,598,988

C.1 FUELS FROM EXISTING REACTORS

28 element CANDU bundle	
	Physical dimensions: 102.5 mm OD x 497.1 mm OL
	Mass: 20.1 kg U (22.8 kg as UO ₂) 2.0 kg Zircaloy in cladding, spacers, etc 24.8 kg total bundle weight
	Fissionable material: Sintered pellets of natural UO ₂
	Average burnup: 8,300 MW day / tonne U (200 MWh/kg U)
	Cladding material: Zircaloy-4
Construction: <ul style="list-style-type: none"> - bundle is composed of 28 elements (fuel pins), arranged in 3 concentric rings with 4 elements in the inner most ring, 8 elements in the second ring and 16 elements in the outer ring - construction includes end plates, spacers and bearing pads to improve flow characteristics and maintain structural integrity 	
Comments: <ul style="list-style-type: none"> - used in Pickering A and B reactors 	

37 element CANDU “standard” bundle


Physical dimensions:

102.5 mm OD x 495 mm OL

Mass:

19.2 kg U (21.7 kg as UO₂)

2.2 kg Zircaloy in cladding, spacers, etc

24.0 kg total bundle weight

Fissionable material:

Sintered pellets of natural UO₂

Average burnup:

8,300 MW day / tonne U

(200 MWh/kg U)

Cladding material:

Zircaloy-4

Construction:

- bundle is composed of 37 elements (fuel pins), arranged in 4 concentric rings with 1 element in the inner most central ring, 6 elements in the second ring, 12 elements in the third ring and 18 elements in the outer ring
- construction includes end plates, spacers and bearing pads to improve flow characteristics and maintain structural integrity

Comments:

- used in Bruce A and B, Darlington, Gentilly-2, Point Lepreau and EC-6 reactors (Gentilly-2 and Point Lepreau have minor construction differences on the end plates and spacers compared to the Bruce and Darlington designs)
- two variants, designated 37R (regular) and 37M (modified), have slightly different center pin configurations and uranium masses. 37M is presently starting to be used in Bruce and Darlington stations.

37 element CANDU “long” bundle


Physical dimensions:

102.5 mm OD x 508 mm OL

Mass:

19.7 kg U (22.3 kg as UO₂)

2.24 kg Zircaloy in cladding, spacers, etc

24.6 kg total bundle weight

Fissionable material:

Sintered pellets of natural UO₂

Average burnup:

8,300 MW day / tonne U

(200 MWh/kg U)

Cladding material:

Zircaloy-4

Construction:

- bundle is composed of 37 elements (fuel pins), arranged in 4 concentric rings with 1 element in the inner most central ring, 6 elements in the second ring, 12 elements in the third ring and 18 elements in the outer ring
- construction includes end plates, spacers and bearing pads to improve flow characteristics and maintain structural integrity

Comments:

- similar to 37 element “standard” bundle, but is 13 mm longer
- used in Bruce B, and Darlington reactors
- two variants, designated 37R-long and 37M-long, have slightly different center pin configurations and uranium masses. 37M-long is presently starting to be used in Bruce stations.

43 element CANFLEX LVRF bundle


Physical dimensions:

102.5 mm OD x 495.3 mm OL

Mass:

18.5 kg U (21.0 kg as UO₂)
 2.1 kg Zircaloy in cladding, spacers, etc
 23.1 kg total bundle weight

Fissionable material:

Sintered pellets of UO₂
 slightly enriched to 1.0% U-235

Average burnup:

8,300 MW day / tonne U
 (200 MWh/kg U)

Cladding material:

Zircaloy-4

Construction:

- bundle is composed of 43 elements (fuel pins), arranged in 4 concentric rings with 1 element in the inner most central ring, 7 elements in the second ring, 14 elements in the third ring and 21 elements in the outer ring
- the inner central element uses Dysprosium (a rare earth element that readily absorbs neutrons and reduces the bundle power maintaining a flat neutronic field profile across the bundle during operation)
- diameter and composition of fuel pins varies by ring
- construction includes end plates, spacers and bearing pads to improve flow characteristics and maintain structural integrity

Comments:

- used in Bruce B reactors, option for use in EC-6 reactors

C.2 FUELS FROM POTENTIAL NEW-BUILD REACTORS

43 element CANFLEX ACR bundle	
	<p>Physical dimensions: 102.5 mm OD x 495.3 mm OL</p>
	<p>Mass: 16.2 kg U (18.4 kg as UO₂) 3.1 kg Zircaloy and other materials in cladding, spacers, etc 21.5 kg total bundle weight</p>
	<p>Fissionable material: Sintered pellets of UO₂ enriched to 2.5% U-235</p>
	<p>Average burnup: 20,000 MW day/ tonne U</p>
	<p>Cladding material: Zircaloy-4</p>
<p>Construction:</p> <ul style="list-style-type: none"> - bundle is composed of 43 elements (fuel pins), arranged in 4 concentric rings with 1 element in the inner most central ring, 7 elements in the second ring, 14 elements in the third ring and 21 elements in the outer ring - diameter and composition of fuel pins varies by ring - construction includes end plates, spacers and bearing pads to improve flow characteristics and maintain structural integrity 	
<p>Comments:</p> <ul style="list-style-type: none"> - used in ACR-1000 reactors 	

AP1000 PWR fuel assembly


Physical dimensions:

214 mm square x 4795 mm OL

Mass:

538.3 kg U (613 kg as UO_2)
 ~176 kg ZIRLO and other materials in
 cladding, spacers, etc
 789 kg total weight

Fissionable material:

Sintered pellets of UO_2
 enriched up to 5% U-235

Average burnup:

60,000 MWday/tonne U

Cladding material:

ZIRLO

Construction:

- Each fuel assembly consists of 264 fuel rods, 24 guide thimbles, and 1 instrumentation tube arranged within a 17 x 17 matrix supporting structure. The instrumentation thimble is located in the center position and provides a channel for insertion of an in-core neutron detector, if the fuel assembly is located in an instrumented core position. The guide thimbles provide channels for insertion of either a rod cluster control assembly, a gray rod cluster assembly, a neutron source assembly, a burnable absorber assembly, or a thimble plug, depending on the position of the particular fuel assembly in the core.

Comments:

- used in Westinghouse AP1000 reactors

EPR PWR fuel assembly	
	Physical dimensions: 214 mm square x 4805 mm OL
	Mass: 527.5 kg U (598.0 kg as UO ₂) ~182 kg other materials in cladding, spacers, etc 780 kg total weight
	Fissionable material: Sintered pellets of UO ₂ enriched up to 5% U-235
	Average burnup: 62,000 MWday/tonne U
	Cladding material: M5
Construction: - Each fuel assembly consists of 265 fuel rods and 24 guide thimbles which can either be used for control rods or for core instrumentation arranged within a 17 x 17 matrix supporting structure. The guide thimbles provide channels for insertion of either a rod cluster control assembly, a gray rod cluster assembly, a neutron source assembly, a burnable absorber assembly, a thimble plug or core instrumentation, depending on the position of the particular fuel assembly in the core.	
Comments: - used in Areva EPR reactors	